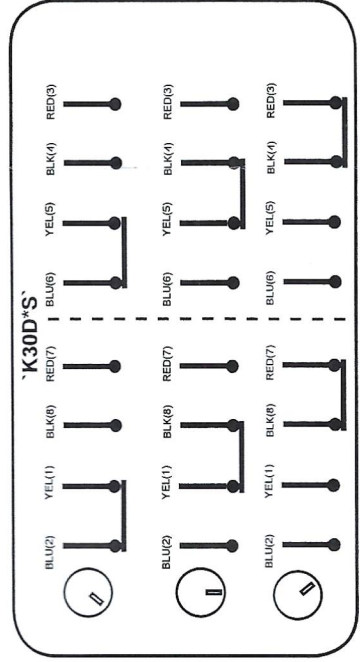
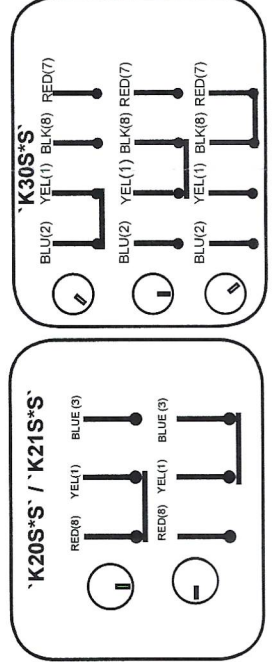


STANDARD KEYSWITCH TYPE OPTIONS
K20S*-2 POSITION, SINGLE POLE, KEY REMOVABLE IN BOTH POSITIONS
K21S*-2 POSITION, SINGLE POLE, KEY RETAINED IN ONE POSITION
K30S*-3 POSITION, SINGLE POLE, KEY REMOVABLE IN ALL POSITIONS
K30D*-3 POSITION, DOUBLE POLE, KEY REMOVABLE IN ALL POSITIONS
K20D*-2 POSITION, DOUBLE POLE, KEY REMOVABLE IN BOTH POSITIONS
K21D*-2 POSITION, DOUBLE POLE, KEY RETAINED IN ONE POSITION
K41S*-2 POSITION, SINGLE POLE, LED, KEY RETAINED IN ONE POSITION

* = COLOUR

ELECTRICAL DATA

ALL KEYSWITCH TYPE CALL POINTS HAVE GOLD OVER SILVER OVER COPPER ALLOY CONTACTS WITH 10 MILLI OHM CONTACT RESISTANCE.

MAXIMUM VOLTAGE: 250VAC @ 50HZ
RESISTIVE RESISTIVE LOAD: 4A @125 VAC / 2A @ 250 VAC
TERMINATION CABLES LIMIT CURRENT TO 5A MAX
OPERATING TEMPERATURE RANGE: -20°C TO + 55°C

CABLE TERMINATION

ALL KEYSWITCH TYPE CALL POINTS ARE SUPPLIED WITH LENGTHS OF 120MM X 170.16MM CABLE SOLDERED TO EACH SWITCH TERMINAL. IT IS INTENDED THAT THE INSTALLER FITS A SUITABLE TERMINAL BLOCK TO THESE CABLES.

CONTACT ARRANGEMENT K20S*#, AND K21S*# TYPES:

ONE PAIR OF CONTACTS NORMALLY OPEN, ONE PAIR OF CONTACTS NORMALLY CLOSED. OPERATION OF SWITCH TRANSFERS CONTACTS. (SEE ILLUSTRATION "K20S*#", K21S*#")

CONTACT ARRANGEMENT K30S*# TYPES:

BOTH PAIRS OF CONTACTS OPEN IN CENTRE POSITION, ONE PAIR CLOSED IN EACH OF THE OTHER TWO POSITIONS. (SEE ILLUSTRATION "K30S*#")

METHODS OF MOUNTING

Flush Installations:
"Call point only" fits directly to a U.K. switch/socket box. A minimum box depth of 35mm is recommended.



Surface Installation:

There is a choice of plastic surface mounting boxes.


Plastic Box-as SR:

The pack box has a tear off template for locating cable entry holes. See illustration 'A' below.

Continuity Link KL1 - Illustration 'B'. For 20mm terminations.



DIMENSIONS

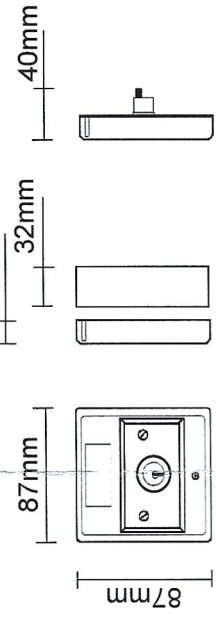


KEYSWITCH HINGED COVER SEAL




FITTING COVER SEAL TO A KEYSWITCH CALL POINT



1. Insert the cover seal into the call point housing as shown. Rotate the seal through 90° ensuring that the tooth is facing towards you.

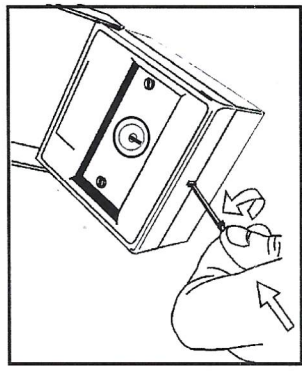

2. Feed the other end of the seal through the hole located in the bottom of the hinged cover. Using pliers carefully pull the seal taut and press the hinged cover back to engage the tooth.

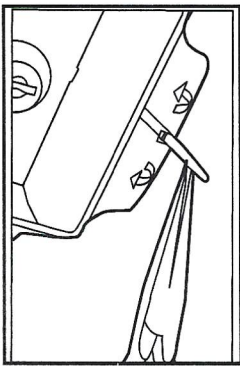

3. Using wire cutters trim the excess from the breakable seal ensuring the tooth remains in position to hold the hinged cover in position.

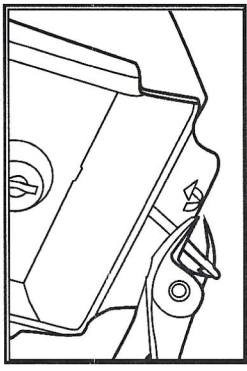

A

B

C

D