
## **Yucel-Series - Valve Regulated Lead Acid Battery** Y3.2-12

# **Data Sheet**

SPECIFICATIONS			
Nominal voltage	12	V	
20-hr rate Capacity to 1.75VPC at 20°C	3.14	Ah	
10-hr rate Capacity to 1.75VPC at 20°C	2.96	Ah	
DIMENSIONS			
Length	134 (±1)	mm	
Width	67 (±1)	mm	
Height	60.5 (±1)	mm	
(height over terminals)	66.5 (±2)	mm	
Mass (typical)	1.35	kg	
TERMINAL TYPE			
FASTON (Quickfit / release)	4.75	mm	
OPERATING TEMPERATURE RANGE			
Storage	-20°(	C to +60°C	
Charge		-15°C to +50°C	
Discharge		-20°C to +60°C	
STORAGE			
Capacity loss per month at 20°C (approx)	3	%	
CASE MATERIAL			
Standard Option	ABS	(UL.94:HB)	
Flame retardant option (FR)		ABS (UL94:V0)	
CHARGE VOLTAGE		,	
	13.65 (±1%)	V	
Float charge voltage at 20°C	2.275 (±1%)	V/cell	
Float Charge voltage temperature correction factor (for variations from the standard 20°C)	-3	mV/cell/°C	
Cyclic (or Boost) charge at 20°C	14.5 (±3%) 2.42 (±3%)	V V/cell	
Cyclic Charge voltage temperature correction factor (for variations from the standard 20°C)	-4	mV/cell/°C	
CHARGE CURRENT			
Float charge current limit	No limit	Α	
Cyclic (or Boost) charge current limit	0.785	A	
MAXIMUM DISCHARGE CURRENT			
1 minute	31	А	
SHORT-CIRCUIT CURRENT & INTERNAL RESISTANCE			
(according to EN IEC 60896-21)			
Internal resistance	N/A	mΩ	
Short-Circuit current	N/A	A	
IMPEDANCE			
Measured at 1 kHz	50	mΩ	
PERFORMANCE & CHARACTERISTICS			
Refer to the technical manual	YUCEL	T	
DESIGN LIFE	1.3022		
EUROBAT Classification: Standard Commercial	3 to 5	Veare	
		years	
Yuasa design life @ 20°C	up to 5	years	
SAFETY			



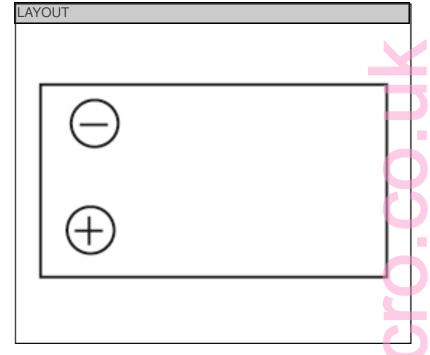

### **3RD PARTY CERTIFICATIONS**

ISO 9001 - Quality Management Systems ISO 14001 - Environmental Management Systems EN 18001 - OHSAS Management Systems UNDERWRITERS LABORATORIES Inc.

## **STANDARDS**

IEC61056







ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE Issue No.: V.1 / Issue Date: July 2010



#### Installation

Can be installed and operated in any orientation except permanently inverted

Batteries must not be suspended by their handles (where fitted)

Each cell is fitted with a low pressure release valve to allow gasses to escape and then reseal.

#### **Gas Release**

VRLA Batteries release hydrogen gas which can form explosive mixtures in air. Do not place inside a sealed container

### Recycling

YUASA's VRLA batteries must be recycled at the end of life in accordance with local and national laws and regulations