

RELAYS & SWITCHES

FIRE ALARM ISOLATE SWITCH




Technical Specifications

Switch Contacts	Double pole, 250v ac 10 Amps max continuous load
Fuse (fused version)	5 x 20mm, quick acting F, H, 250 VAC ceramic tube
Enclosure	ROHS compliant FR ABS - 87 W x 87 H x 44 D (mm)

Order Codes

FAIS-R-B	Mains isolate switch, red, with back box
FAIS-R-L	Mains isolate switch, red, lid only
FAIS-W-B	Mains isolate switch, white, with back box
FAIS-W-L	Mains isolate switch, white, lid only

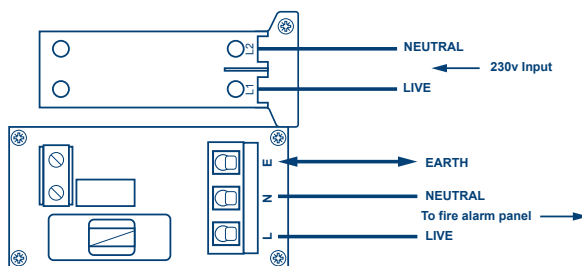

- Complies with the recommendations of BS 5839 Pt 1 & BS EN60669
- Suitable for surface or recess fitting
- Low profile lid (15mm)
- Fits standard 15mm single gang back box
- Power indicator LED
- Uses standard fish key
- 10A rated switch
- Double pole isolation for increased safety
- Protected by 5A fuse (fitted as std), up to 8A can be fitted
- Fire retardant ABS enclosure



+44 (0) 1895 424505