

STI Universal Stopper®



KEY FEATURES

General Information

- These indoor and outdoor low profile or dome polycarbonate covers can protect a variety of devices without restricting legitimate operation.
- Three year guarantee against breakage of polycarbonate in normal use (one year on electromechanical and electronic components).

Design

- Prevents false alarms, without hindering legitimate operation of a manual call point in the event of an emergency.

Construction

- Tough polycarbonate housing can withstand severest of knocks.

Installation

- A simple 4 fixing installation can retrofit over existing device.
- Can accommodate flush or surface mount applications.
- Typical working properties of polycarbonate are -40° to 121°C (-40° to 250°F).

Electronics

- Available with or without a 96 dB integral sounder, powered by a 9V PP3 battery. The sounder draws immediate attention to the area.
- Optional 12-24 VDC powered units.

Options

- One breakseal is supplied with each model. Additional breakseals are available for added security.
- Available in a range of colours.
- Custom labelling available.

PRODUCT OVERVIEW

These indoor and outdoor low profile or dome polycarbonate covers protect devices such as manual call points, emergency buttons and dual action pull stations etc., without restricting legitimate operation. The versatile cover offers excellent protection against physical damage (both accidental and intentional), dust and grime as well as severe environments inside and out.

IMPORTANT NOTICE

When used on fire systems, Universal Stopper is intended for areas where the incidence of false fire alarms from manual call points is high or has proven to be a serious problem. Any disadvantage of the device is more than balanced when one considers the consequences of false fire alarms, especially if fire service personnel and equipment are responding to a false fire alarm when they are needed for a real fire somewhere else. Add to this the disruption to the facility when false alarms occur. If you have, or may have, a problem with false fire alarms or physical/weather damage to your fire alarm activation devices, the Universal Stopper could prove invaluable.



For more information, call +44 (0)1527 520 999 or visit www.sti-emea.com

STI Universal Stopper®

Dimensions and Technical Information

BUILD YOUR OWN MODEL

STI-1

Cover Options:

- 3 = Dome cover
- 4 = Low profile cover (only available with hood/horn option '00')

Mounting Options:

- 0 = Flush Mount (Open backed)
- 1 = Surface Mount - Clear Spacer (Dual Mount - Open backed)
- 2 = Surface Mount - Hinged Coloured (Open backed) Spacer
- 3 = Enclosed Flush Back Box
- 4 = US Enclosed Back Box, ¾ NPT Thread Point & Sealed Mounting Plate
- 5 = US Enclosed Back Box, ¾ NPT Thread Point & Open Mounting Plate
- 6 = European Enclosed Back Box, 20mm Thread Point & Sealed Mounting Plate
- 7 = European Enclosed Back Box, 20mm Thread Point & Open Mounting Plate
- 8 = US Enclosed Back Box, ¾ NPT Thread Point & European Sealed Mounting Plate
- 9 = US Enclosed Back Box, ¾ NPT Thread Point & European Open Mounting Plate
- A = European Enclosed Back Box, 20mm Thread Point & US Sealed Mounting Plate
- B = European Enclosed Back Box, 20mm Thread Point & US Open Mounting Plate

NB: Options 2, 4, 5, 8, 9, A & B are special orders and would acquire longer lead times

Hood/Horn Options:

- 00 = No Label hood (Label option must be NC)
 - 10 = Label hood without sounder**
 - 20 = Label hood with sounder**
 - 30 = Label hood with sounder and relay**
- ** All colours except NC

Housing/Sounder Colour & Label Options:

- FR = Red - Fire Label
- EG = Green - Emergency Exit Label

Custom Label

- CK = Black
- CB = Blue
- CG = Green
- CR = Red
- CW = White
- CY = Yellow

No Label

- NK = Black
- NB = Blue
- NC = Clear
- NG = Green
- NR = Red
- NW = White
- NY = Yellow

For custom label option, must provide wording (2 lines, 30 characters per line including spaces limit)

EXTERNAL DIMENSIONS (mm):

Mounting Option	Height	Width	Depth
Flush	207	137	68
Surface	207	137	105
Enclosed Flush Back Box	207	137	71
Enclosed Back Box	207	137	102

APPROVALS

TESTING

- ADA Compliant
- Cover option '3' only has been tested and approved or listed by:
- UL/cUL Listed No. S2466

Back box with opened mounting plate

- IP rating 56

Back box with sealed mounting plate

- IP rating 66

MODELS AVAILABLE

STI-13010-FR Universal Stopper, (flush mounted, dome cover with open back) without sounder, with fire label

STI-13120-EG Universal Stopper, (surface mounted, dome cover with open back) with sounder, with emergency exit label

PLEASE REFER TO BUILD YOUR OWN MODEL TO GENERATE OVER 500 VARIATIONS OF THIS PRODUCT


ACCESSORIES:

- STI-1331** 37mm Spacer
 - DC1224** Remote Wiring Harness for Remote Power Servicing Pin
 - E009** Universal Stopper Backplate
 - STI-1314** Universal Stopper Backplate
 - CKS001** Replacement Sounder Unit
 - STI/BS** Break Seals (Quantity, 10)
 - CKS006** Replacement Housing Shell (Red)
- Add -G for Green, -B for Blue, -Y for Yellow, -K for Black, -W for White

NB:

- Red Fire Label: 'In Case of Fire - Lift Cover Break Glass'
- Green Emergency Exit Label: 'In Case of Emergency - Lift Cover Break Glass to open Door'
- European Enclosed Back Box = Clear Frosted
- US Enclosed Back Box = Coloured

DIMENSIONS:

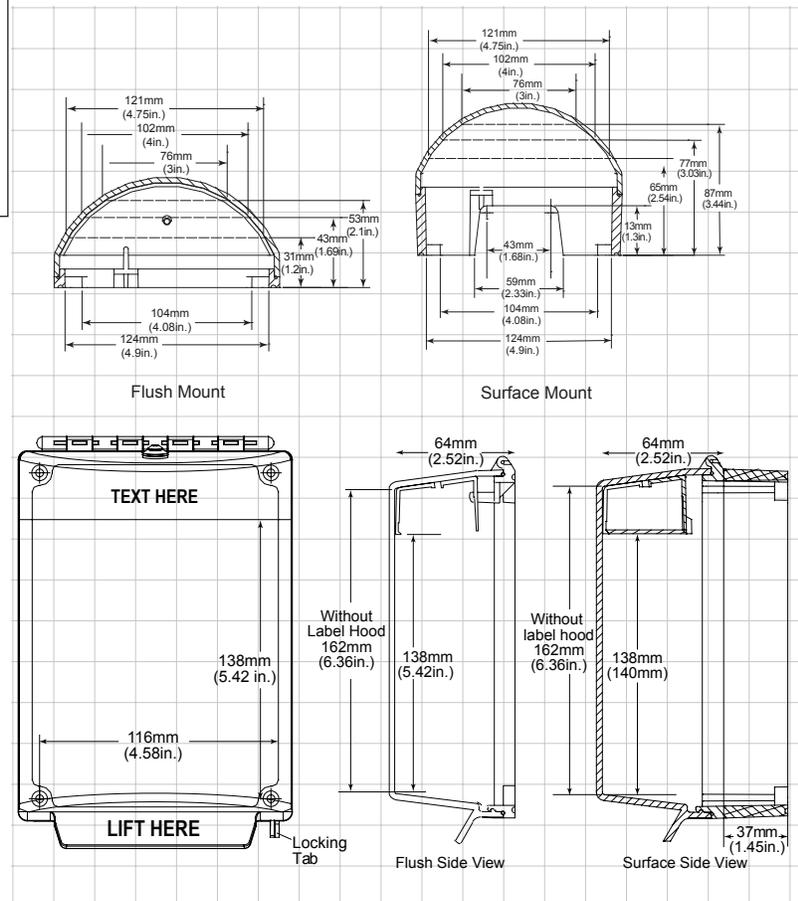

Safety Technology International

UK Office

Taylor House
34 Sherwood Road
Bromsgrove
Worcestershire
B60 3DR, England

Tel: +44 (0)1527 520 999
Fax: +44 (0)1527 501 999
info@sti-emea.com
www.sti-emea.com

USA Head Office

2306 Airport Road
Waterford, Michigan
48327 - 1209

Tel: +248-673-9898
Fax: +248-673-1246
Toll-free: 0800-888-4STI
info@sti-usa.com
www.sti-usa.com