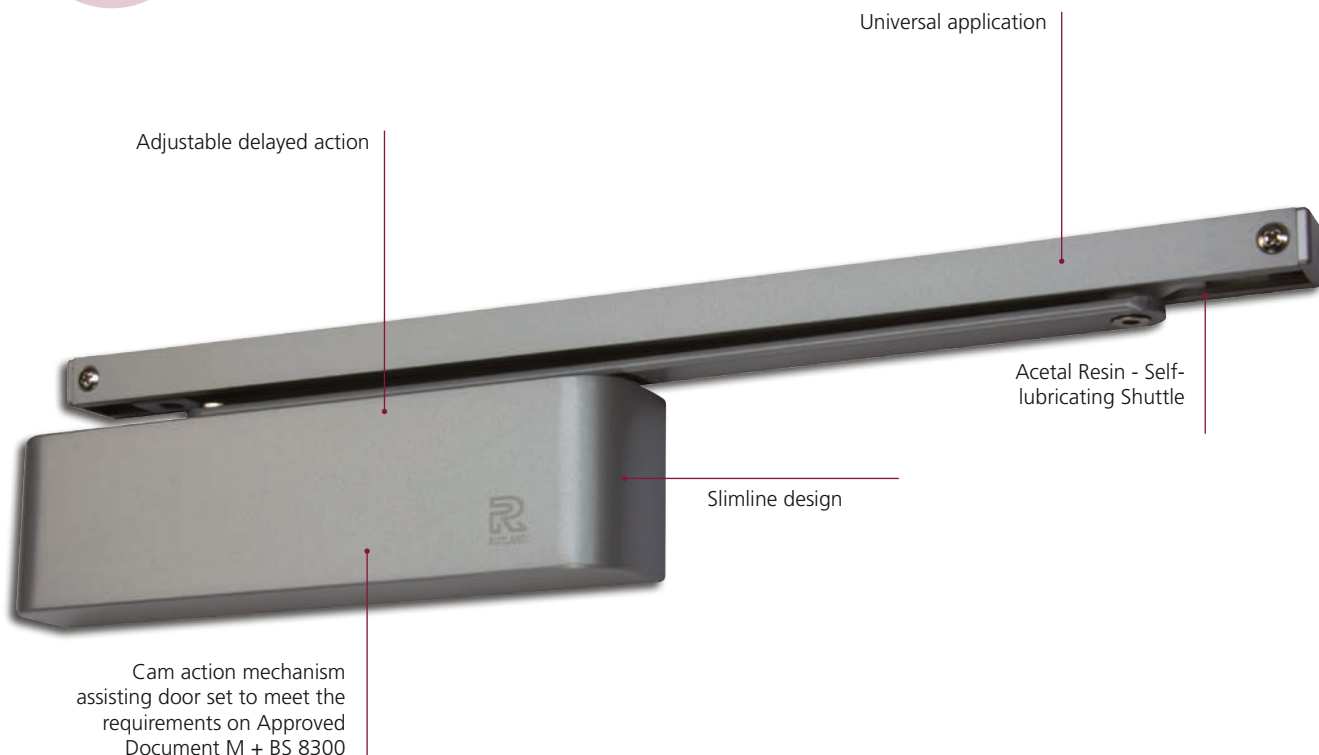


TS.11205 Slide Arm Closer

Power
Adjustable
EN2-5 by
Spring



Silver (SE)



Satin Nickel Plate (SNP)



Polished Nickel Plate (PNP)



Electro Brass (PVD)

Product Overview

- ✓ Variable power size EN 2-5
- ✓ CE & UKCA marked and UL listed
- ✓ Universal fitting
- ✓ Available with back check and adjustable delayed action
- ✓ Easy to read instructions, saving 12 minutes of fitting time
- ✓ Corrosion Grade 3 – Recommended for internal use



Specification Overview




Tested to EN1634



Max Door Weight up to 110kg



Opening Angle 120°



Max Door Width 1250mm



Universal Application



Adjustable Closing Speed



Adjustable Delayed Action



Power Size EN2-5



Adjustable Latch Speed



Guarantee



TS11205 CPR2012222



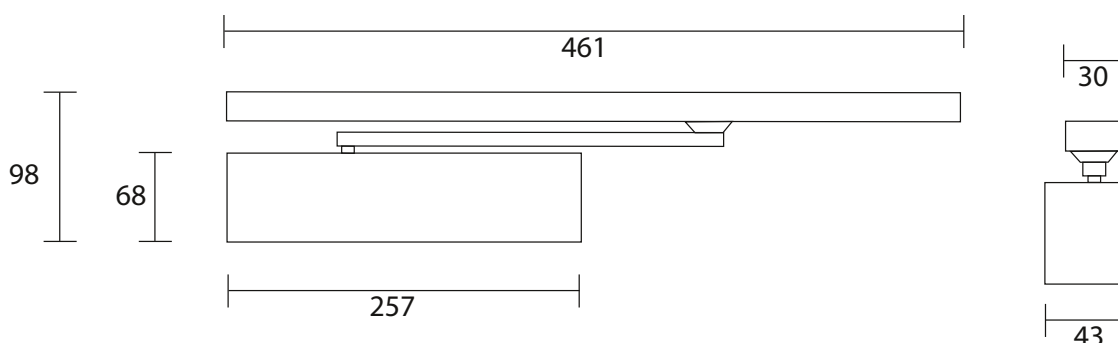
Min Door 857mm fig30



Rut Lock

Cover

All dimensions shown are in mm.



For fitting instructions see website - www.rutlanduk.co.uk

Technical Information

BS EN 1154 Classification

TS.11205 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE & UKCA marked and classified as follows:



BS EN 1634 Fire Test

TS.11205 door closers have been tested to EN 1634 Fire Pressure Test for, 30 and 60 minutes on a TFTDoor and TFCDDoor.

ADA Compliant

Fire doors shall have a minimum opening force allowable by the appropriate administration authority, and doors other than fire doors 5 pounds maximum opening force (22.2N) from push or pull side.

UL Listed

The TS.11205 has been certified and labelled to the Underwriters' Laboratories (UL) testing, inspection, certification, auditing and validation.








Options

- Mechanical hold open slide rail (*Not to be used on fire doors. Not covered by CE*)
- Back check available as a cushion stop in the rail
- For uninsulated doors see code in components list for intumescent kit

Other Benefits

- BS8300 & ADA.cv door closer helping the less able (min door size 857mm)

TS.11205 Components

Description	EN Size	Finish	Re-order Code	Product Code	Box Qty
 TS.11205 cam action slide arm door closer combined unit (with SA.2 rail and connector bar - CB.5)	2-5	Silver	12044	TS.11205.SR.2.SESE	6
		Satin Nickel	12045	TS.11205.SR.2.SNPSNP	6
		Polished Nickel	12042	TS.11205.SR.2.PNPPNP	6
		Electro Brass	12043	TS.11205.SR.2.PVDPVD	6
 TS.11204 cam action with square cover	2-5	Silver	12157	TS.11205DA.SR.2.SESE	6
		Satin Nickel	12158	TS.11205DA.SR.2.SNPSNP	6
 TS.11000 series semi radius cover	-	Silver	11291	SR.114.SE	25
		Satin Nickel	11292	SR.114.SNP	25
		Polished Nickel	11289	SR.114.PNP	25
		Electro Brass	11290	SR.114.PVD	25
		Antique Brass	12025	SR.114.AB	25
 TS11205 concealed door closer-to-slide arm connector bar options (single action not handed)	-	Silver	11022	CB.5.SE	50
		Satin Nickel	11023	CB.5.SNP	50
		Polished Nickel	11020	CB.5.PNP	50
		Electro Brass	11021	CB.5.PVD	50
		Antique Brass	12023	CB.5.AB	50
Optional Mounting Bracket	-	-	11179	MP.114	10
 461mm long Slide Rail for surface or concealed fixing		Silver	11247	SA.2.SE	25
		Satin Nickel Plate	11248	SA.2.SNP	25
		Polished Nickel	11245	SA.2.PNP	25
		Electro Brass	11246	SA.2.PVD	25
		Antique Brass	12024	SA.2.AB	35
 Slide Rail Drop Plate		Silver	12154	SA.DP.SE	25
 Slide Rail Drop Plate		White	12007	SA.DP.WH	35
 Hold open device (Not for use on fire doors)		Silver	11251	SA.HO	25
 Cushion stop		White cushion stop	11249	SA.CS	25
 Fixing pack for the TS.11204		Satin Nickel	11958	FIX.2.114.SNP	100
		Polished Brass	11957	FIX.2.114.PVD	100
Intumescent Kit for uninsulated steel doors		Black	12407	IP.114SM	100
Anti-Ligature		Black	12075	FIX.AL	-
Slide Arm cover		Satin Nickel	12238	SAC.2.SNP	25
Stop Block		Black	11236	SA.1.BLOCK	25