


TS FIRETRAK.114 Electromagnetic Slide Arm Closer

Power
Adjustable
EN2-4
by Spring

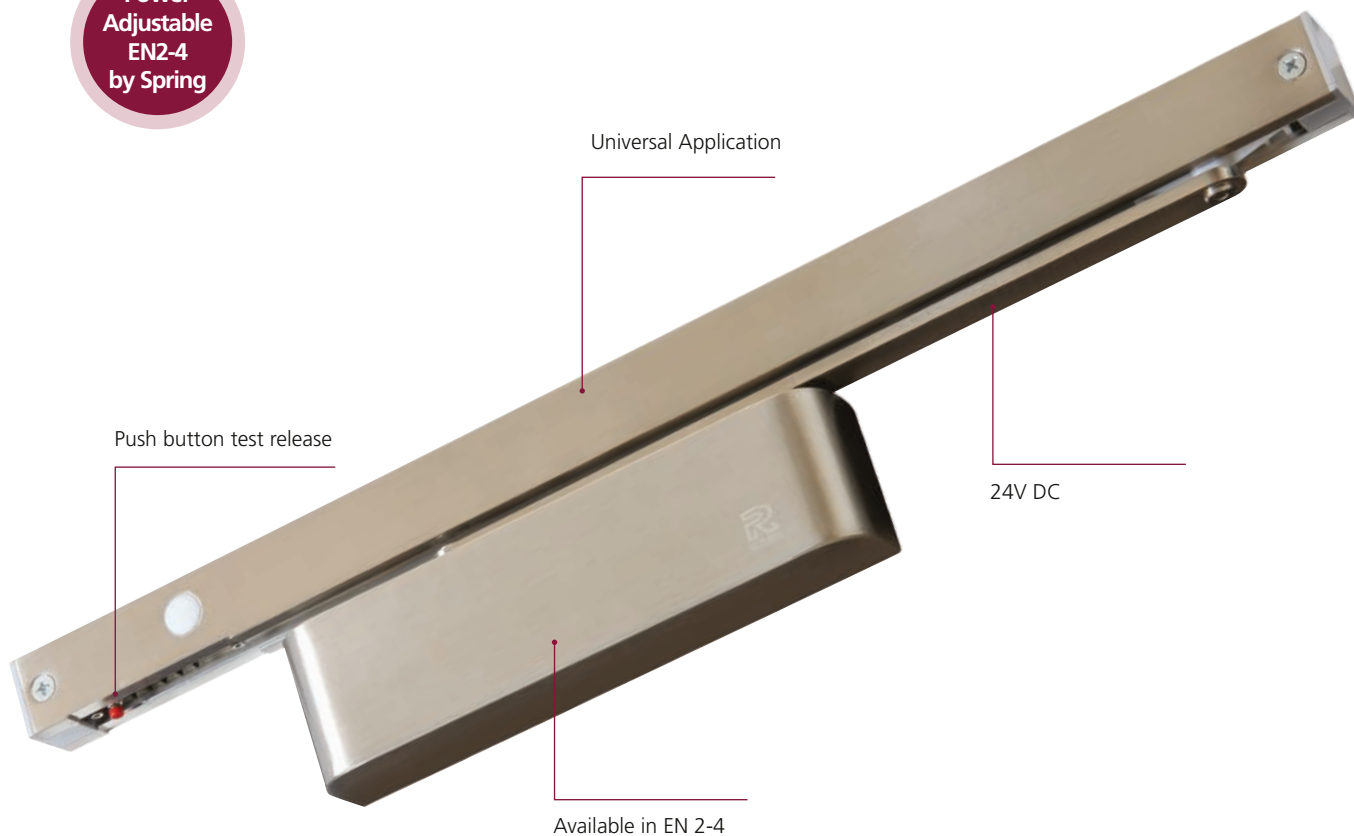

Silver (SE)

Satin Nickel Plate (SNP)

Product Overview

- ✓ Variable power size EN 2-4
- ✓ Cam Action Mechanism
- ✓ CE marked
- ✓ Universal fitting
- ✓ Electromagnet is activated by the fire alarm or over-ridden on the switch
- ✓ Fire tested to EN1634
- ✓ Corrosion Grade 3 – Recommended for internal use

Specification Overview




Fire Tested
to EN1634




Max Door Weight
EN 2-4 - 80kg



Opening Angle
130°



Max Door Width
EN 2-4 - 1100mm



Universal
Application



Power Size
EN 2-4



Min Door
857mm



24V Direct
Current



Adjustable
Closing Speed



Adjustable
Latch Speed




Guarantee



IFCC 1512

All dimensions shown are in mm.

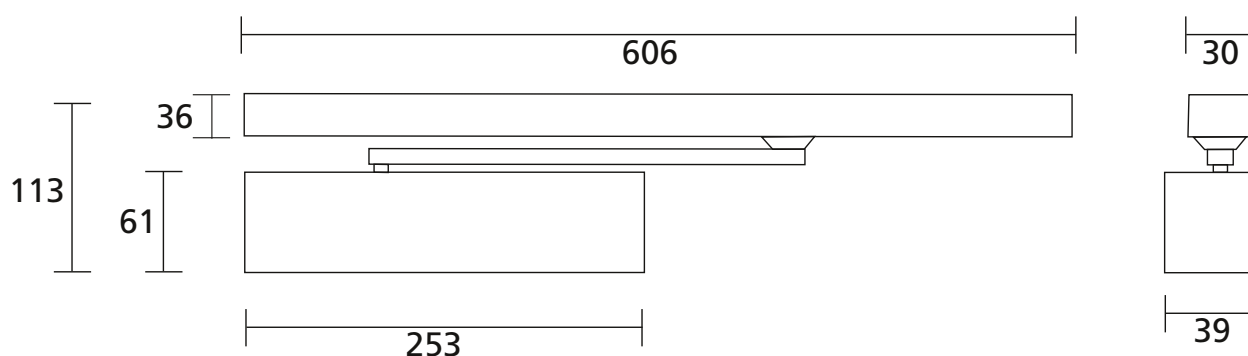

For fitting instructions see website - www.rutlanduk.co.uk

Technical Information

Volts: 24DC

Amp: 84ma Draw

Watts: 2W

The current 2A 24VDC Power Supply Unit (PSU) we stock has 4 outputs.

EN 1155 Classification

Tested to EN 1155:1997, 24V DC. Which cover building hardware, specifically electrically powered hold open devices for swing doors.

BS EN 1634 Fire Test

The TS.FIRETRAK has been fire tested to the BS EN 1634 standard to over 60 minutes.

Options

- Finishes available: Silver, Satin Nickel
- Power Supply Unit is available - on request
- Anti-Ligature
- For uninsulated doors use IP.FIRETRAK.114SM

Description	EN Size	Finish	Re-order Code	Product Code
 Electromagnetic slide arm door closer	2-4	Silver	12446	TS.FIRETRAK.114.SE
		Satin Nickel	12447	TS.FIRETRAK.114.SNP
Anti-Ligature Fixing Bolt for Connector Bar	-	Black	12075	FIX.AL
Intumescent for uninsulated steel doors	-	Black	12462	IP.FIRETRAK.114SM