

STRATOS Hi

High output (522lm) Emergency light

CHANNEL
SAFETY SYSTEMS



Model

E/STRATOS/Hi

3 hours


LiFePo4 6.4v 3.0AH Battery Self-Test

Ideal for high risk task lighting or high level applications, the STRATOS-Hi offer a stylish solution to meet the higher lighting level required in BS5266 2016


The STRATOS-Hi also benefits from in built 'self-test' function, which ensures the fitting is tested to meet the required standards.

Supplied with a full set of exit legends as standard the STRATOS-Hi offers a cost effective solution for difficult emergency lighting areas.

Dimensions [mm]

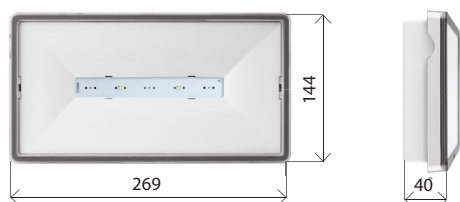

universal pictogram included




Accessories



option with recessed mount
kit applied

mounting option with 30°
bracket applied

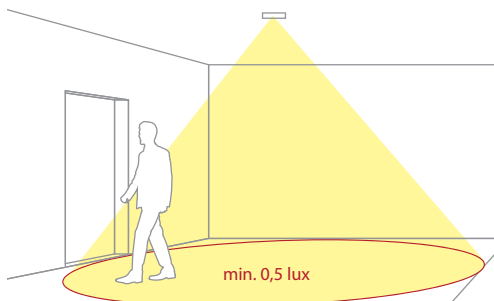

Technical parameters

light source

2 led / 5w

Battery operating time

mode

M / NM

Luminous flux

243 lm / 522 lm

Power supply

210 ÷ 250 V Ac 50 ÷ 60hz;
186 ÷ 254 V Dc

Protection degree

IP65

Insulation class

ii

temperature range

t +10 °C ÷ +40 °C

colour

☐ RAL 9003

Certificates



Photometry

[m]	A	B	C	D
2,5	4,5	11,0	11,0	4,5
3,0	4,9	12,1	12,1	4,9
4,0	5,4	13,9	13,9	5,4
5,0	5,8	15,5	15,5	5,8
6,0	6,1	16,9	16,9	6,1
7,0	6,2	17,8	17,8	6,2
8,0	6,4	18,7	18,7	6,4
9,0	6,3	19,4	19,4	6,3
10,0	6,2	20,1	20,1	6,2

