



1800-101

TalentumTT²

The TalentumTT² is a test explicitly designed to work with the full range of Talentum® Flame Detectors.

Using the intuitive menu, choose the type of Flame Detector to be tested; squeeze the trigger, and the TalentumTT² will automatically perform a test from a distance of up to 8 metres, which means that in many applications, the Flame Detector can be tested from ground level.

The TalentumTT² recreates the characteristic spectrum of a flame using a combination of UV and IR bulbs. Once testing is complete the TalentumTT² can store your test results for download to a PC.


The TalentumTT²'s integral battery is recharged via USB from either a PC or off the shelf USB charger.



Specification

Suitability	Talentum UV, UV/IR, UV/IR2, IR3
Range	8m (max)
Test Time	Up to 40 tests each of 30 seconds
Service Interval	2000 tests, or 2 years
Batteries	Lithium Ion rechargeable
Battery charging time	3 hours (fast), 8 hours (normal) from 80%
Charging and data port	USB type C
Weight	850g
Dimensions	112(W) x 245(H) x 197(D)mm
Ingress protection rating	IP54
Operating temperature	-10°C to +55°C
Storage temperature	-20°C to +65°C

Dimensions

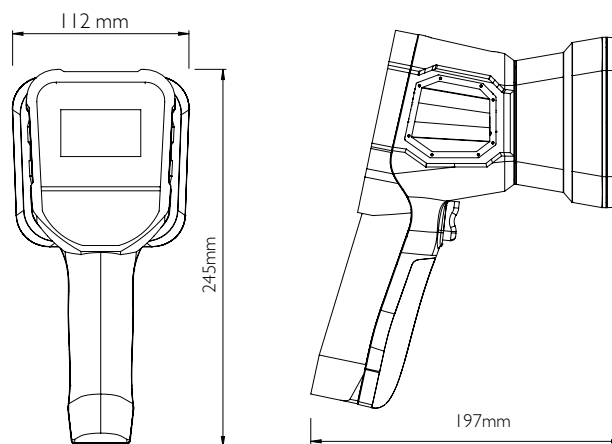

Ordering codes:

1800-101 TalentumTT² without calibration kit

Installation Recommendations

Please refer to our User Manual for usage of the TalentumTT².

FFE Ltd assumes no responsibility for their use. Data and design are subject to change without notice. Installation and wiring instructions are shipped with the products and should always be used for actual installation. For more information, contact your Sales Representative.



FFE Limited
9 Hunting Gate, Hitchin
Hertfordshire, SG4 0TJ UK

t +44 (0) 1462 444 740

e sales@ffeuk.com

w www.ffeuk.com