

CHANNEL

LIGHTING & SAFETY SYSTEMS

SOLENT



LED emergency luminaire
from Channel Safety Systems



LED Emergency Luminaire

IP65 weatherproof rated and suitable for both internal and external environments, the Solent LED Bulkhead is designed to provide high light output in the event of an emergency.

Features


- Long life LED technology
- Maintained / Non-maintained operation
- Can be ceiling or wall mounted
- Comes with Pictogram Pack
- Sleek and minimalistic design
- Optically enhanced diffuser
- Polycarbonate construction
- Lightweight and easy to install
- Lithium LiFePo4 battery
- Semi-recessing kit available
- Low environmental impact & running costs
- Meets BS EN 60598-1:2008 and other relevant standards
- IP65 weatherproof
- 150 lm emergency output
- Hinged screwless gear tray
- 16mm or 20mm conduit entry



E/SOLENT/M3 - SOLENT - LED IP65



110mm

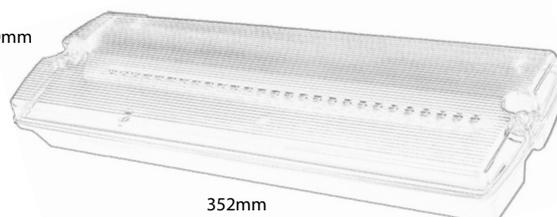

352mm

Depth of product
68mm

PHOTOMETRIC SPACING DATA (1 lux)

Mounting height				
2.5m	2.4	5.8	5.4	2.4
4m	1.0	4.9	5.2	1.0

SPECIFICATIONS

Light Source	White LED
IP Rating	IP65
Emergency Duration	3 hours (minimum)
Lumen Output	150 lm Maintained & Emergency output (6000K)
Mains Current (max)	50mA (max) 35mA quiescent (3W)
Recharge Period	Less than 24 hours
Charge Indicator	Integral green LED Red LED fault indicator
Changeover Voltage	As per requirements of BS EN 60598-1:2008
Battery	3.2v 1500mAH - LiFePo4

PRODUCT CODE	DESCRIPTION
E/SOLENT/M3/Li	Solent LED 3 Hour maintained emergency light with Pictogram Pack
E/BEZ/SOL	Solent Semi flushing Bezel
B/BATT/MM/Li	Solent Battery



www.channelsafety.co.uk

Tel: 0845 884 7000

Email: sales@channelsafety.co.uk

Errors & omissions excluded. Specification is subject to change without notice.