CHANNEL

LIGHTING & SAFETY SYSTEMS

Azelio Emergency Track



LED emergency luminaire from Channel Safety Systems



LED Emergency Luminaire

The Track emergency light is a Non-Maintained Emergency Light.

It is supplied with a 3 circuit Global Track adapter.

It is designed to provide high light output in the event of an emergency.

Track adapter can be easily swapped to match almost any track profile.

Features

- Long life LED technology
- Non-maintained operation
- Global 3 circuit track adapter
- Sleek contemporary design
- Quick & simple to install
- NiCD battery
- Low environment impact & running cost
- Meets BS EN 60598 & other relevant standards
- Designed to give enhanced spacing


RANGE FEATURES









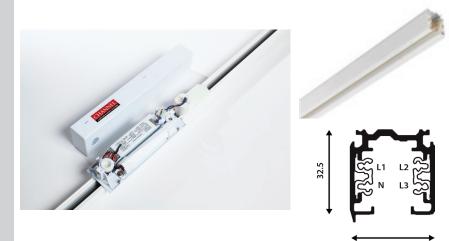

Azelio Track	Transverse to Wall		Transverse to Transverse		Axial To Axial		Axial to Wall	
Mounting Height	0.5 Lux	1 Lux	0.5 Lux	1 Lux	0.5 Lux	1 Lux	0.5 Lux	1 Lux
2.4m	3.00	3.10	6.00	5.80	6.00	5.80	3.50	3.10
3m	3.50	3.25	7.00	6.50	7.00	6.50	3.50	3.25
4m	4.50	4.00	9.00	8.00	9.00	8.00	4.50	4.00

SPECIFICATIONS					
Light Source	White LED				
IP Rating	IP20				
Emergency Duration	3 hours (minimum)				
Mains Current (max)	50mA (max) 35mA quiescent (3W)				
Recharge Period	Less than 24 hours				
Charge Indicator	Integral green LED				
Changeover Voltage	As per the requirements of BS EN 60598-1:2008				
Battery	NiCD Battery				





www.channelsafety.co.uk Tel: 0845 884 7000

Email:

customerservices@channelsafety.co.uk

PRODUCT CODE DESCRIPTION

E/AZELIO/TRACK Azelio 3 hour non maintained emergency track light

Errors & ommissions excluded. Specification is subject to change without notice.